

# Max IV Wire Connections


27kawwire.doc

## Harness Part Number 011050 Harness Used In Production as of Serial Number 19007 Kawasaki 27hp Liquid Cooled

<u>WIRE LABEL</u>	<u>CONNECTION ON VEHICLE</u>
A-----	TO INDAK KEYSWITCH MODEL 3B464
B-----	TO HEADLIGHTS, RED (+) BLACK (-)
BB-----	HEATED THROTTLE CABLE (LOAD)
C-----	TO KAWASAKI 27HP ENGINE Q-TO RED (CHARGE) ON ENGINE V-TO YELLOW/WHITE (FUEL SOLENOID & REGULATOR) ON ENGINE M-TO BLACK (KILL) ON ENGINE LL-TO YELLOW (TEMP. SENSOR) ON ENGINE
D-----	TO AMMETER (-)
E-----	CHASSIS GROUND (-)
EE-----	HEATED THROTTLE CABLE GRN. (-)
FF-----	TEMPERATURE LIGHT (+)
GG-----	2 AMP HEATED THROTTLE CABLE FUSE (PWR TO CABLE SWITCH)
I-----	TO AMMETER (+) KEYSWITCH END TO BATTERY (+) BATTERY END
II-----	FUEL PUMP (-)
J-----	TO TAIL LIGHTS (+)
JJ-----	HEATED THROTTLE CABLE SWITCH (-)
MM-----	CHASSIS GROUND (-)
N-----	TO TAIL LIGHTS (-), GND. TO CHASSIS
O-----	KEYSWITCH BASE GROUND
P-----	TO HOUR METER (-)
R-----	25 AMP ATC TYPE MAIN FUSE
S-----	KEYSWITCH JUMPER
U-----	TO STARTER SOLENOID
W-----	TO HOUR METER (+)

NOTE: Due to the labeled drawing being an assembly drawing, all the letters on drawing number 011050 are not listed in the above connections section.

REV	DESCRIPTION	EON	BY	DATE	APP
B	CHANGE WIRE LENGTHS	R0393	MP	12/17/03	MP
C	CHNG LI. TO STRIPE	R0397	MP	12/17/03	MP

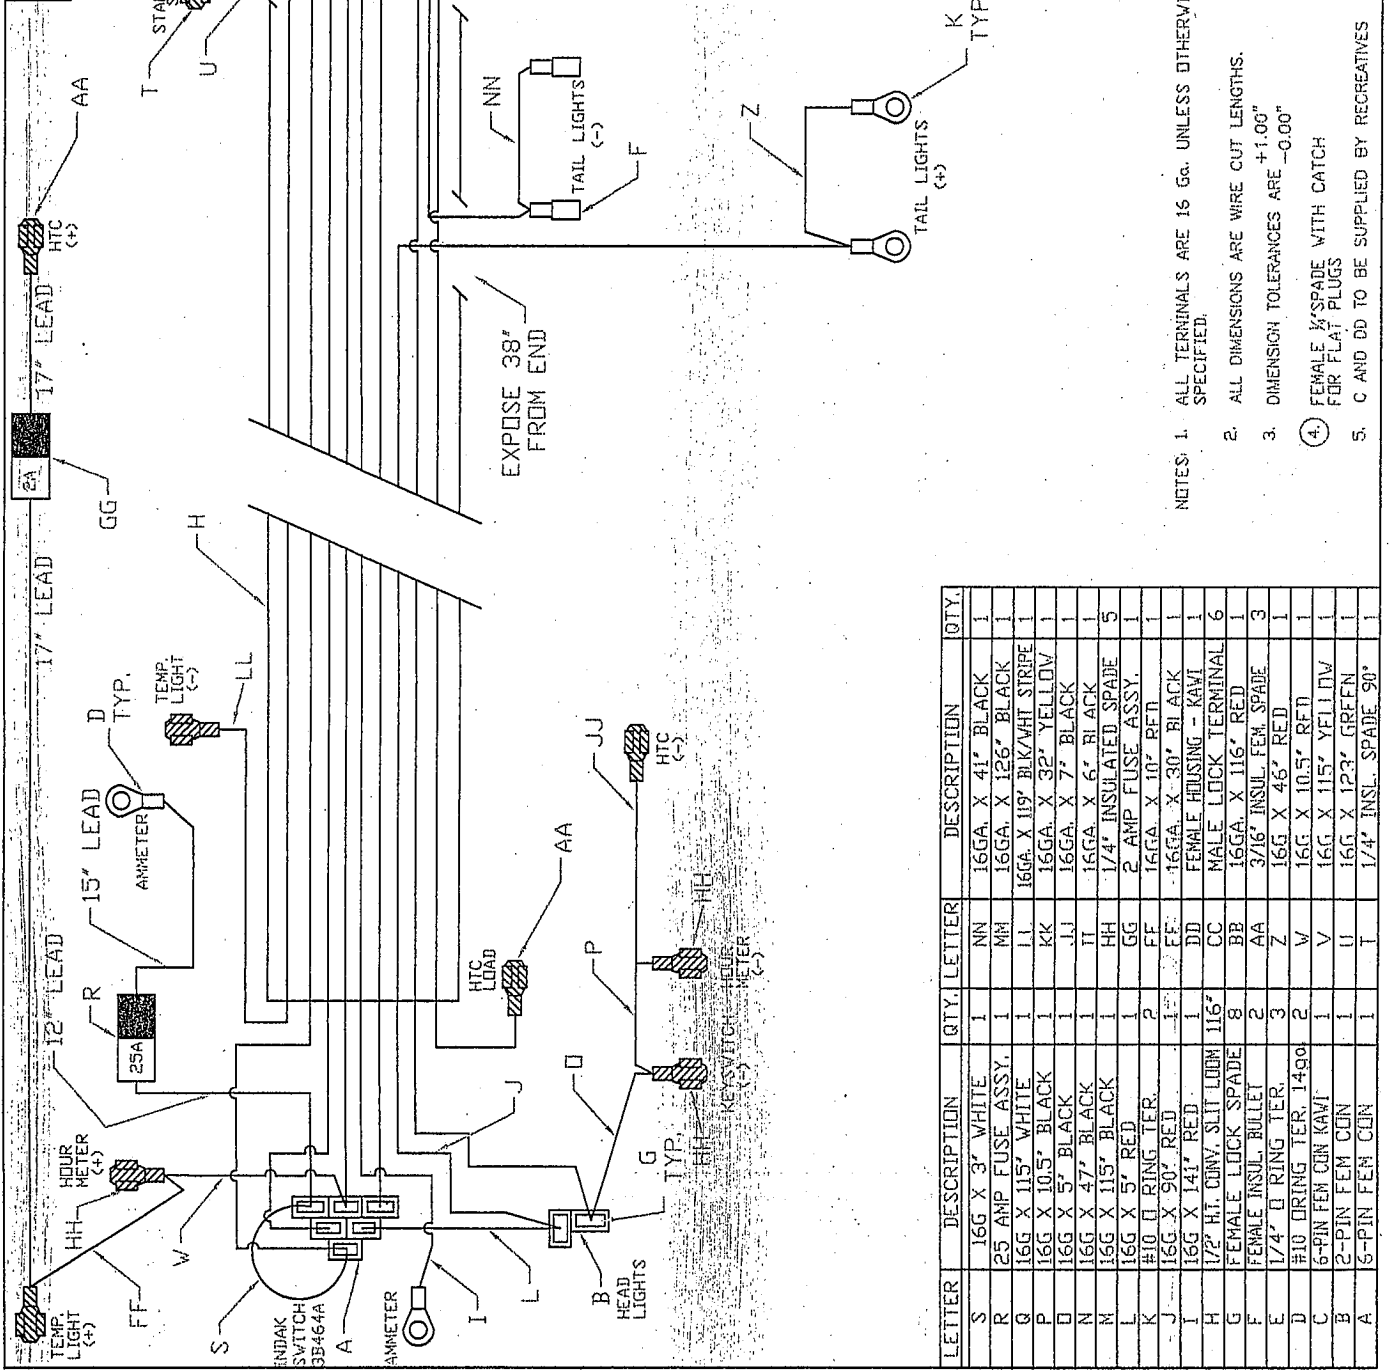

NOTES UNLESS OTHERWISE SPECIFIED

<b>RECREATIVES INC</b>	
TOLERANCES : UNLESS OTHERWISE SPECIFIED	
FRACTIONS ± 1/32, ANGLES ± 1°, HOLES ± .003	
DECIMALS : XXXX ± .03 XXXX ± .010	
SCALE	DRAWN DATE
FULL	MP 6/4/03
REF 1 REQ'D	APP MP EXP NO
MATERIAL (SEE NOTES)	
PARTNAME WIRING HARNESS	
KAWASAKI 27HP LIQUID	
SIZE/PART NUMBER	SHT 1 REV
C 011050	OF 1 C

- NOTES:
1. ALL TERMINALS ARE 16 GA. UNLESS OTHERWISE SPECIFIED.
  2. ALL DIMENSIONS ARE WIRE CUT LENGTHS.
  3. DIMENSION TOLERANCES ARE +1.00" -0.00"
  4. FEMALE 3/16" SPADE WITH CATCH FOR FLAT PLUGS
  5. C AND DD TO BE SUPPLIED BY RECREATIVES

LETTER	DESCRIPTION	QTY.	LETTER	DESCRIPTION	QTY.
S	16G X 3' WHITE	1	NN	16GA. X 41" BLACK	1
R	25 AMP FUSE ASSY.	1	MM	16GA. X 126" BLACK	1
Q	16G X 115" WHITE	1	LL	16GA. X 119" BLK/WHT STRIPE	1
P	16G X 10.5" BLACK	1	KK	16GA. X 32" YELLOW	1
D	16G X 5" BLACK	1	JJ	16GA. X 7" BLACK	1
N	16G X 47" BLACK	1	II	16GA. X 6" BLACK	1
M	16G X 115" BLACK	1	HH	1/4" INSULATED SPADE	5
L	16G X 5" RED	1	GG	2 AMP FUSE ASSY.	1
K	#10 O RING TER.	2	FF	16GA. X 10" PFT	1
J	16G X 90" RED	1	EE	16GA. X 30" BLACK	1
I	16G X 141" RED	1	DD	FEMALE HOUSING - KAWI	1
H	1/2" HT. CONV. SLIT LOOM	116'	CC	MALE LOCK TERMINAL	6
G	FEMALE LOCK SPADE	8	BB	16GA. X 116" RED	1
F	FEMALE INSUL. BULLET	2	AA	3/16" INSUL. FEM. SPADE	3
E	1/4" O RING TER.	3	Z	16G X 46" RED	1
D	#10 O RING TER. 1490	2	V	16G X 10.5" RED	1
C	6-PIN FEM CON KAWI	1	U	16G X 115" YELLOW	1
B	2-PIN FEM CON	1	T	16G X 123" GREEN	1
A	5-PIN FEM CON	1		1/4" INSL. SPADE 90°	1